

Fig. 2A

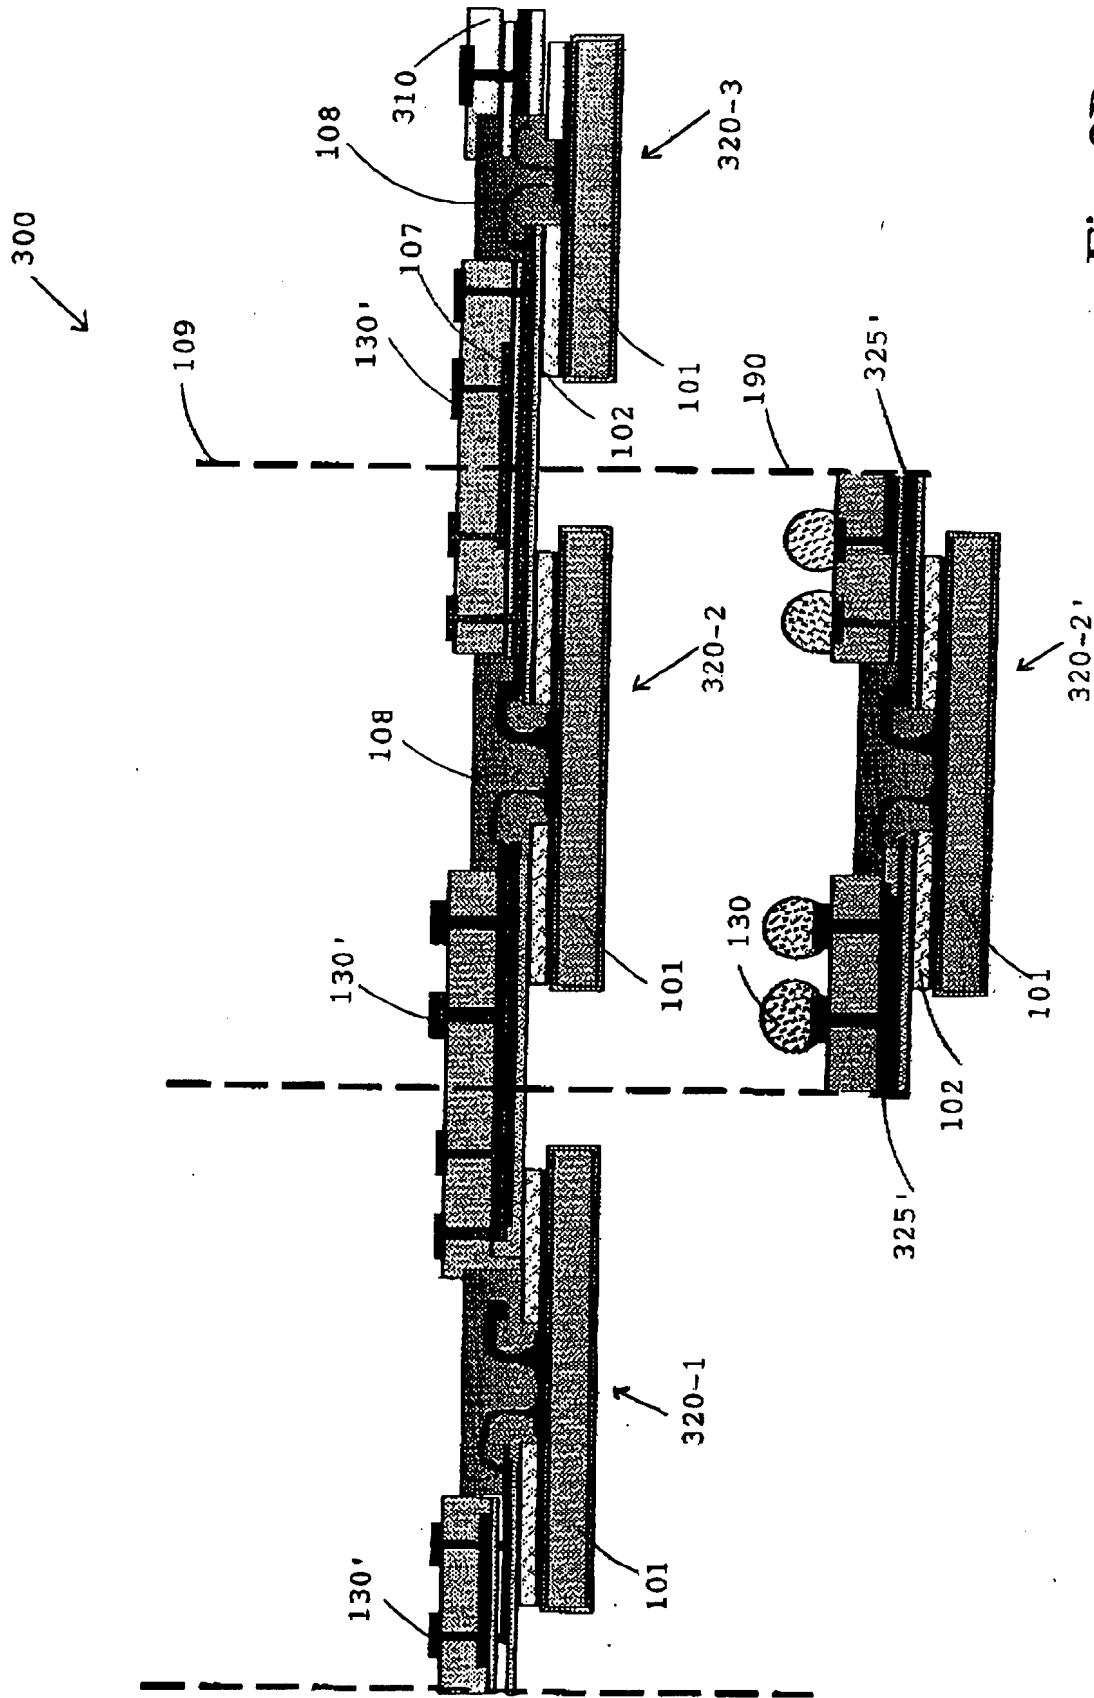


Fig. 2B

Fig. 2C

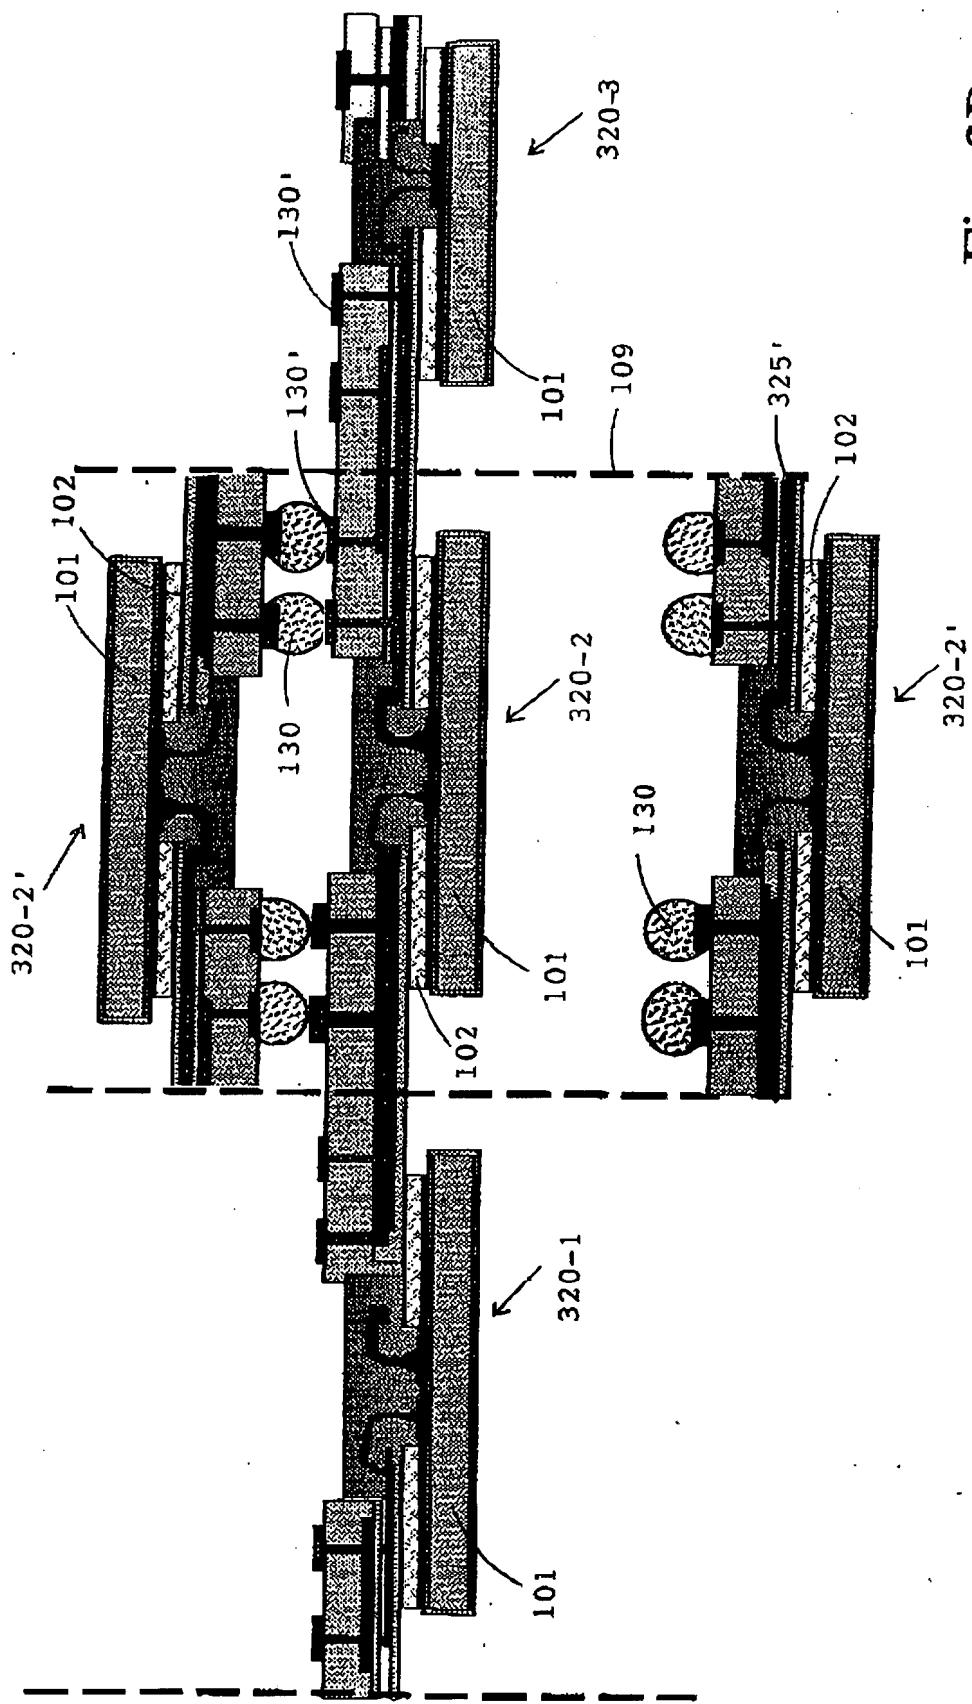


Fig. 2B

Fig. 5

VERY STRINGENT REQUIREMENTS FOR SMT PACKAGES

Package Qualification Tests with Level 3 Preconditioning

10 X Temperature Cycle (16 to +150 deg. C)

Bake at 125 deg. C for 24 Hrs

Temperature Humidity Soak (30 deg. C, 60% RH, 192 Hrs)

Temperature Humidity Soak (30 deg. C, 60% RH, 192 Hrs)

Vapor Phase (215 deg. C, 60 Sec., 3 Passes)

Thermal Shock Test	Temperature Cycle Test	Autoclave Test	Temp. Humidity Bias
Liq. to Liq. -65 to +150 deg. C 1,000 Cycles	Air to Air -65 to +150 deg. C 1,000 Cycles	121 deg. C, 100% RH 15 PSIG, 96 Hrs.	85 deg. C, 85% RH 3.3 Volts, 1008 Hrs.

These requirements will not be applied on edge connected sub-system such as
SIMM/DIMM, PCMCIA or Slot 2 formats.